



## Introducing Classic Series II Speakers

Classic Boston Performance

Classic Boston Styling

Classic Boston Value



## Classic Boston speakers, Classic Boston value

Classic Series II was designed to offer Boston's legendary sound, classic look, exceptional quality, and value. Classic loudspeakers provide an excellent foundation for a multi-channel home theater system or a stereo-only music system. The Classic Series II includes a high performance floorstanding loudspeaker, two bookshelf loudspeakers, a center channel, a 100-watt powered subwoofer, and a satellite/center loudspeaker package. All Classic models are finished in Black Walnut Vinyl - a classic look that looks great anywhere.

### Key features

- Boston Kortec® soft dome tweeters for crystalline high-frequency sound
- Graphite injected polymer woofers utilize Deep Channel® Design (DCD) for more bass from less amplifier power
- Acoustically tuned port for improved bass
- MagnaGuard® magnetic shielding prevents video interference
- 5-way gold-plated binding posts for hook-up flexibility and the purest signal transfer





## Available now.


CS 260 II

Dual 6½" 2-Way Floorstanding Speaker



CS 225C II

Dual 5¼" 2-Way Center Channel Speaker

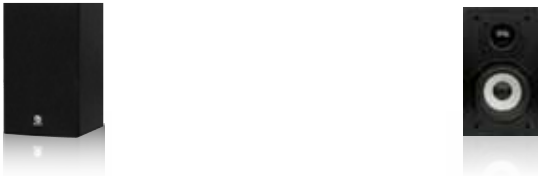

CS 23 II

CS 23 II 2-Way 3½" Bookshelf Speaker



CS Sub10 II

100 Watt 10" Down-firing DCD Subwoofer

## Specifications

	CS 23 II
<b>Frequency Range (±3dB)</b>	120Hz – 20kHz
<b>Recommended Amplifier</b>	10 – 150 watts
<b>Sensitivity</b>	89dB [SPL/2.8V at 1m]
<b>Nominal Impedance</b>	8 ohms
<b>Crossover Frequency</b>	3,200Hz
<b>Woofers</b>	3½" (89mm) DCD Graphite injected polymer woofer
<b>Passive Radiators</b>	—
<b>High-Frequency Driver</b>	1" (25mm) Kortec® Soft Dome
<b>Dimensions (H x W x D)</b>	7 <sup>11</sup> / <sub>16</sub> x 4 <sup>11</sup> / <sub>16</sub> x 5 <sup>5</sup> / <sub>16</sub> " (194 x 118 x 135mm)
<b>Weight:</b>	3 lbs (1.45Kg)

## CS 225C II

80Hz – 25kHz

15 – 175 watts

89dB [SPL/2.8V at 1m]

8 ohms

2,800Hz

Dual 5¼" (133mm) DCD

Graphite injected

polymer woofer

—

1" (25mm) Kortec

Soft Dome

6<sup>5</sup>/<sub>8</sub> x 16<sup>5</sup>/<sub>16</sub> x 8<sup>5</sup>/<sub>16</sub>"

(167 x 414 x 210mm)

13 lbs (6Kg)

## CS 260 II

46Hz – 25kHz

15 – 250 watts

89dB [SPL/2.8V at 1m]

8 ohms

2,800Hz

Dual 6½" (165mm) DCD

Graphite injected

polymer woofer

—

1" (25mm) Kortec

Soft Dome

38¼ x 7<sup>11</sup>/<sub>16</sub> x 12<sup>3</sup>/<sub>4</sub>"

(972 x 194 x 322mm)

27 lbs (12.3Kg)

## Specifications

	CS Sub10 II
<b>Frequency Range</b>	35 – 150 Hz
<b>Amplifier Power</b>	100 watts RMS; BassTrac® circuitry eliminates distortion
<b>Bass Driver</b>	10" (254mm) DCD
<b>Dimensions (H x W x D)</b>	16 x 15 x 15" (406 x 381 x 381mm)
<b>Weight:</b>	26 lbs (12kg)

Boston Acoustics continually strives to update and improve its products.  
The specifications and construction details are subject to change without notice.



300 Jubilee Drive, Peabody, MA 01960 [bostonacoustics.com](http://bostonacoustics.com)

© 2011 All rights reserved. Boston, Boston Acoustics, BassTrac, Deep Channel, Kortec, the B/A ellipse symbol, and MagnaGuard are registered trademarks of Boston Acoustics, Inc.