



CANOR Virtus M1

Vacuum Tube Power Amplifier

CANOR Virtus M1



Virtus M1 is a brand new vacuum tube power amplifier of pure A-class designed and produced by CANOR. It is considered a reference power amplifier of the CANOR brand.

Highlights of the Virtus M1

01

SOLID ALUMINIUM
CHASSIS – LEADS
TO THE OVERALL
ROBUSTNESS AND
ELIMINATES THE
VIBRATIONS

02


SUPERSYMMETRIC
DESIGN –
ELIMINATES
INTERFERING
SIGNALS

03


EXTREMELY LOW
HARMONIC
DISTORTION – ONE
OF THE BEST EVER
SEEN IN VACUUM
TUBE AMPS

CANOR Virtus M1

Harmonic distortion - **0,0028% at 1W**;
0,011% at 5W and 0,13% at 50W

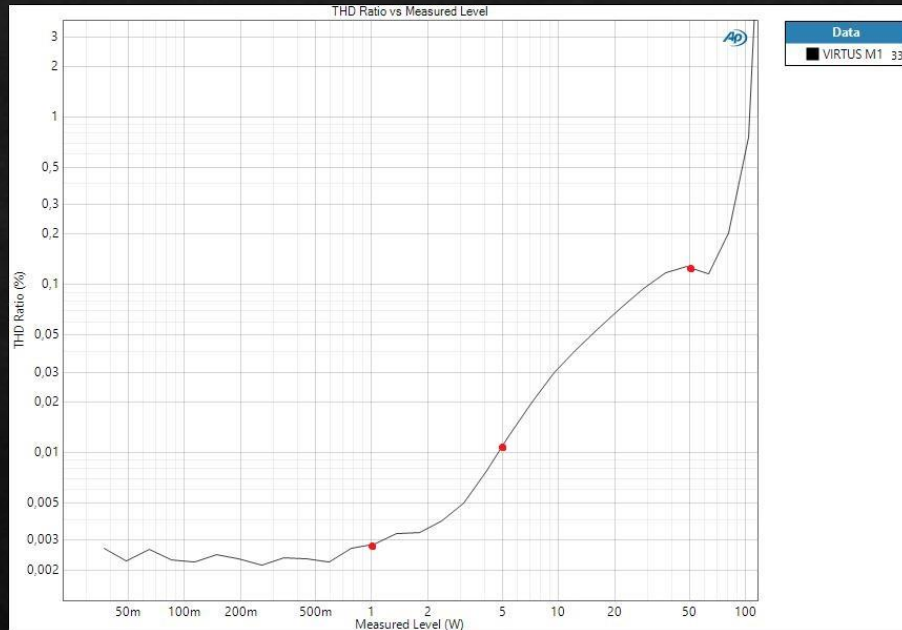

...is achieved by harmonizing (tuning up)
all circuits and components

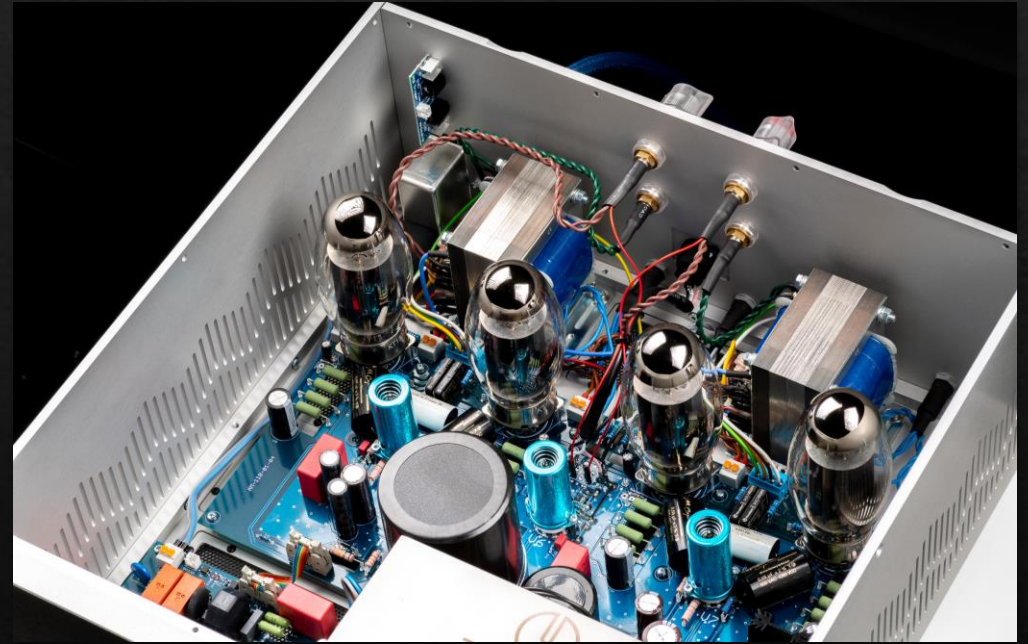

CANOR Virtus M1



The power transformer

The transformer core is vacuum impregnated, and the entire transformer is encapsulated in a special anti-vibration compound. In addition, the massive, welded cover in which the transformer is located creates effective electromagnetic shielding and contributes significantly to the excellent signal-to-hum distance.

The additional capacitor at the input improves the dynamic of the anode voltage filtration.



High filtration capacity

The filtration capacity is 3.900 μ F/550V.

A choke, that is placed under welded cover, has been used to eliminate anode voltage ripple, which increases the filtering efficiency of the 100 Hz component of the anode voltage.

CANOR Virtus M1



The output transformers

The output permalloy transformers specially designed for the power amplifier.



High class capacitors

Only high-quality polypropylene capacitors are used in the signal path.



The signal path conductors

The conductors on the signal paths consist of slow drawn oxygen-free copper, which is coated with pure silver.

CANOR Virtus M1

Technical specification

Output power	1 x 110W / 8 Ohm – ultra linear (THD < 3%)
	1 x 55W / 4,8 Ohm – triode (THD < 3%)
Gain	24 dB / 4 Ohm
Frequency range	10 – 50.000 Hz $\pm 0,5$ dB / 5 W
Input impedance	200 kOhm
Inputs	1 x XLR
Harmonic distortion	<0,05% (1 kHz, 5W / 8Ohm - ultra linear)
	<0,005% (1 kHz, 1W / 8Ohm - ultra linear)
Signal-to-noise ratio	> 103 dB (20Hz-80kHz)



CANOR Virtus M1

Technical specification

Tube complement	4x KT150, 2x ECC82, 1x 12AX7
Power	230 V / 50-60 Hz
Dimensions (w x h x d)	450 x 190 x 465 mm
Weight (net)	40 kg





A tube specialist since 1995

